


4410-A Hawkins St. NE
 Albuquerque New Mexico 87109
 (505) 345-1486 / Fax (928) 776-4208
 e-mail: sales@filteklfilters.com

**Lumped Element Lowpass
 LP12 Series
 10 to 5000 MHz**

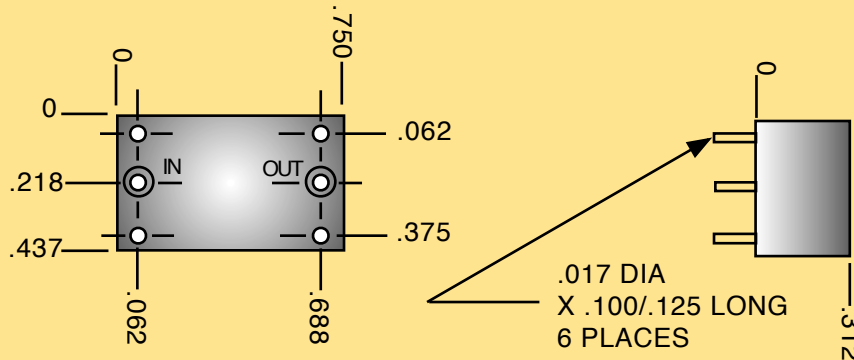

See Page 12 in the full catalog for 'C' dimensions and other connector configurations. The size shown is a standard used by FILTEK to facilitate a low cost, easily reproducible unit. Should you require another size, please submit all of your requirements - both electrical and mechanical. This will enable FILTEK to quote the optimum design for your application.

Specifications

Electrical

Center Frequency (Fco)
 Number of Sections Available
 Nominal Impedance
 Maximum VSWR (.4 Fco to Fco)
 Maximum Fco Insertion Loss
 Stopband Attenuation
 Average Power (Watts Max to 10K Feet)
 Peak Power (Watts Max to 10K Feet)

STANDARD

250 to 2500 MHz
 3 to 5
 50 Ohms
 1.5/1
 See Chart Below
 See Curve page 45*
 1
 5

SPECIAL

10 to 5000 Mhz
 2 to 10
 75 or 100 Ohms
 1.25/1
 See Chart Below
 See Curve Page 45*
 5
 25

*Page 45 in Full Catalog

Insertion Loss

The Maximum Insertion Loss in the passband is equal to:

(Loss Factor X Number of Sections) + .05 dB

Example:

The Maximum loss for a 3 Section LP12 Series filter with Fco at 1000 MHz is:

$(.26 \times 3) + .05 = 0.83\text{dB}$

Cutoff Frequency (MHz)	250 to 300	301 to 400	401 to 500	501 to 1000	1001 to 2500
Loss Factor	.42	.36	.32	.26	.24

Environmental

Vibration (10 to 2000 Hz)
 Shock (11 mSec)
 Humidity
 Operating Temperature
 Non-Operating Temperature

STANDARD

10 G
 30 G
 90% Relative
 0° to +50°C
 -25° to +75°C

SPECIAL

30 G
 100 G
 100% Relative
 -25° to +100°C
 -54° to +125°C